


● Specifications

Nominal Voltage		12V
Rated Capacity		26Ah
Dimensions	Total Height	4.90 inches (125mm)
	Height	4.90 inches (125mm)
	Length	6.50 inches (166mm)
	Width	6.90 inches (175mm)
Approximate Weight		18.07lbs. (8.20kg)


● Characteristic

Capacity 77°F(25°C)	20h rate (1.30A)	26Ah
	10h rate (2.41A)	24.1Ah
	5h rate (4.16A)	20.8Ah
	1h rate (16.1A)	16.1Ah
	15 min rate (43.6A)	10.9Ah
Internal Resistance	Full Charged Batter 77°F(25°C)	9mΩ
Capacity Affected by Temperature (20h rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 68°F(20°C) (Capacity after)	3 month storage	90%
	6 month storage	80%
	12 month storage	60%
Max. Discharge Current 77°F(25°C)	375A(5s)	
Terminal	T3/T10	
Charge (Constant Voltage, 25°C)	Cycle	14.5~14.9V(-24mV/°C) max. current: 10.4 A
	Float	13.6~13.8V(-18mV/°C)


DISCHARGE CHARACTERISTICS AT 25° (77° F)*

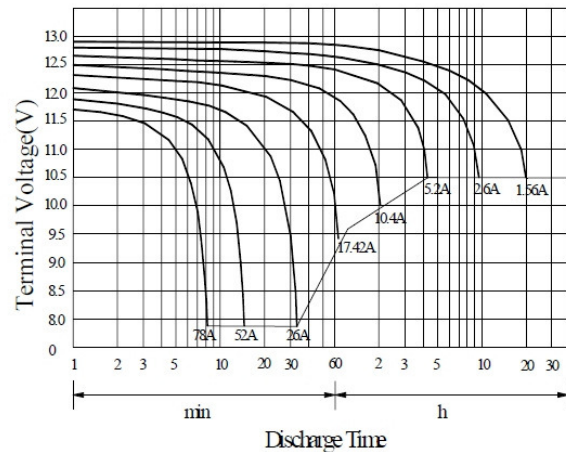

DISCHARGE CURRENT VS TIME 25° (77° F)

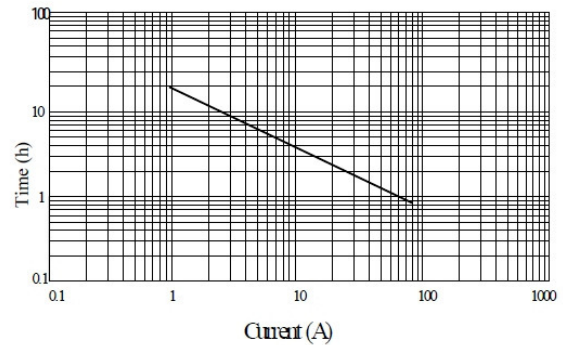

*The above data are of average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.

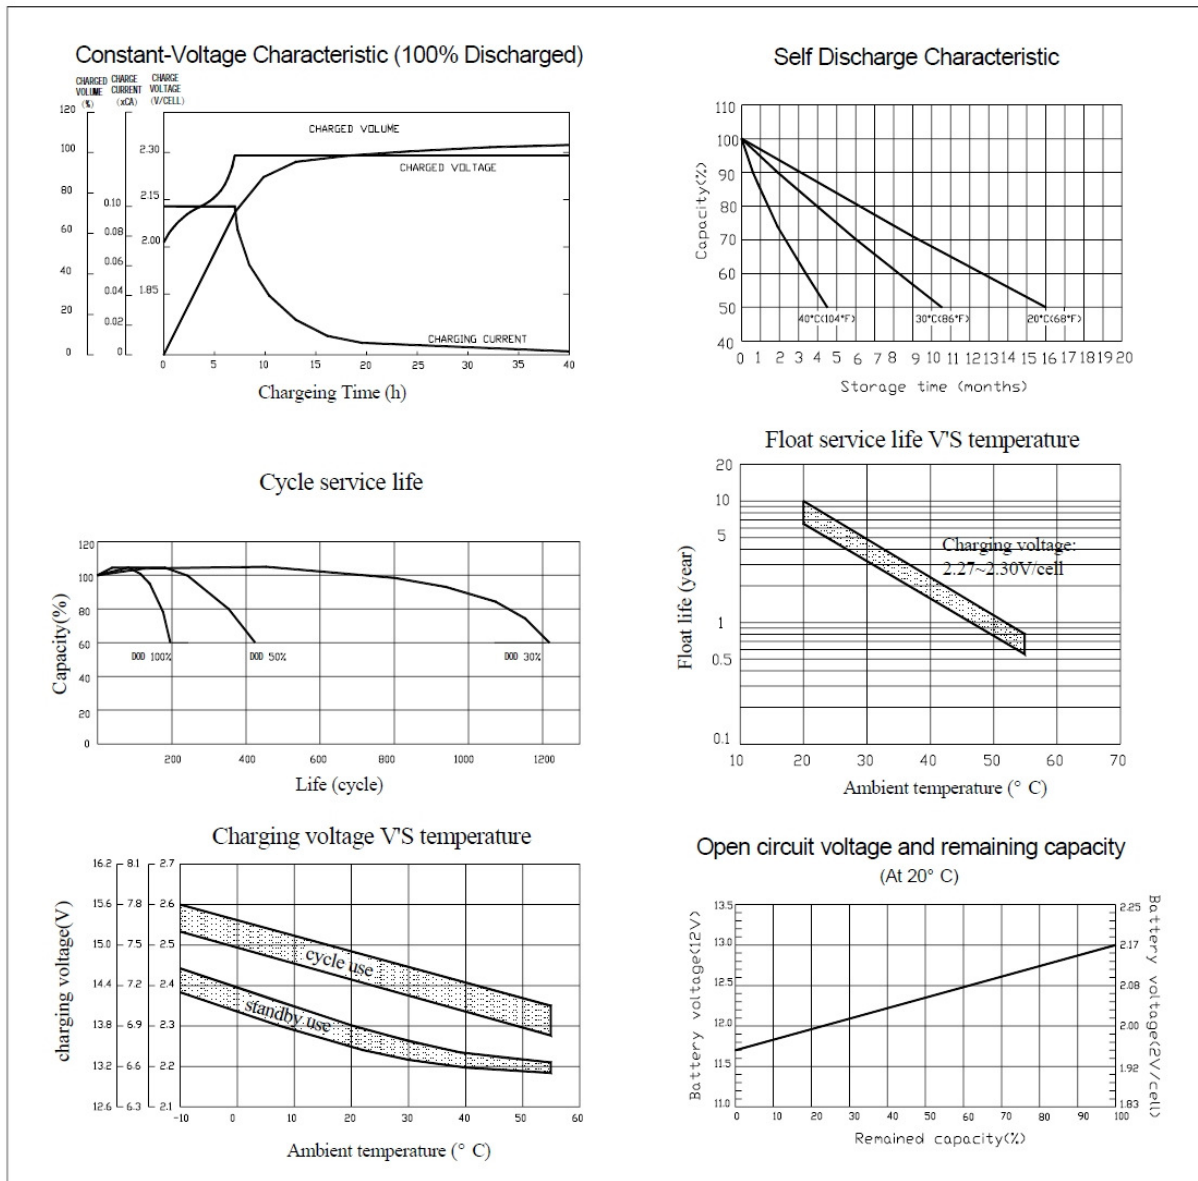

● **Constant wattage discharge at stipulated cut-off voltages: Watt/Ah/Cell at 25^oC**

Final voltage (V/cell)	5m	10m	15m	30m	45m	1h	2h	3h	5h
1.60V	182	118	89.4	48.9	34.3	26.8	18.0	13.1	8.63
1.65V	178	116	88.4	48.9	34.1	26.8	17.8	13.0	8.51
1.70V	175	112	87.4	48.4	33.9	26.6	17.5	12.8	8.36
1.75V	167	110	86.3	47.8	33.8	26.5	17.1	12.4	8.13
1.80V	165	108	85.3	46.8	33.3	26.0	16.4	12.0	7.84